

Single-channel tissue perfusion monitor

Multi-channel tissue perfusion monitor

# Setting the standard in blood perfusion assessment since 1996

- Continuous tissue perfusion assessment for ischaemia-related research
- Real-time laser Doppler tissue blood flow assessment
- · Outstanding accuracy, stability, and performance
- Motion artifact rejection technology built-in\*
- Unrivalled ease-of-use
- Measurement from up to 4 tissue sites simultaneously\*
- Intuitive touch-screen user interface\*

#### A worldwide audience

Our OxyFlo™ laser Doppler tissue perfusion monitors are employed the world over in ischaemia-related research focussed on peripheral vascular disorders, stroke and cerebral ischemia, angiogenesis, vital organ vitality, transplantation, and more



## Versatility

A range of probe types support a host of specialist disciplines and applications requiring both invasive or non-invasive tissue blood flow assessment.



## Motion artifact rejection

Our multi-channel OxyFlo™ Pro monitors incorporate a proprietary artefact rejection technology, effectively filtering out the presence of motion artefacts in the blood flow signal (e.g., generated by breathing motion).

## Performance and ease-of-use

Our third-generation laser Doppler opto-electronics ensure industry-leading sensitivity, stability, and accuracy, while one-time probe calibration and automatic probe identification mostly eliminate calibration procedures.

#### **Multi-channel productivity**

The OxyFlo™ Pro monitor is available as a 2-channel or a 4-channel device for the simultaneous monitoring from up to 4 probes and thus tissue locations. It features a touchscreen display presenting data in both digital and graphical formats, and providing access to additional instrument settings.




## OxyLite<sup>™</sup> ready

OxyFlo™ monitors are configured for use alongside our OxyLite<sup>™</sup> oxygen monitors for the simultaneous measurement of tissue oxygen and blood flow using unique multiparameter sensors.

#### **Data logging**

A choice of traditional 0-5V analogue outputs and a digital data output compatible with the popular LabChart® Pro charting software by ADInstruments is offered across all OxyFlo™ monitors.

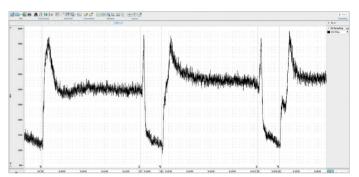

# 2-year product warranty

All OxyFlo™ monitors are covered by our comprehensive 2-year manufacturer's warranty.



<sup>\*</sup>OxyFlo™ Pro monitors only Intended use statement: OxvFlo™ and OxvFlo™ Pro are intended for laboratory, industrial and research use only.